

2013-02-15

Cryogenics Test Lab

# Energy Efficient Storage and Transfer of Cryogenics

The 2<sup>nd</sup> Workshop – 2013  
*Converged Research Center for Liquefied Material Using  
Magnetic Refrigeration*  
Jeju, South Korea

James E. Fesmire  
Cryogenics Test Laboratory  
NASA Kennedy Space Center

27Feb2013

NASA-KSC

1

Cryogenics Test Lab

**T**he Cryogenics Test Laboratory, NASA Kennedy Space Center, works to provide *practical solutions to low-temperature problems* while focusing on long-term technology targets for *energy-efficient* cryogenics on Earth and in space.



*Space launch and exploration is an **energy intensive** endeavor;  
cryogenics is an energy intensive discipline.*

27Feb2013

NASA-KSC

2

The **Cryogenics Test Laboratory, NASA Kennedy Space Center**, is a one-of-a kind capability for research, development, and application of cross-cutting technologies to meet the needs of industry, government, and research institutions.

Technology focus areas include:

- ✓ ***Thermal insulation systems***
- ✓ ***Cryogenic components & materials***
- ✓ ***Propellant process systems***
- ✓ ***Low-temperature applications***

27Feb2013

NASA-KSC

3



## Outline

- I. Heat Energy (Introduction)
- II. Thermal Insulation Standards
- III. Storage of Cryogenics
- IV. Transfer of Cryogenics
- V. Applications

27Feb2013

NASA-KSC

5

## I. Heat Energy (Introduction)


27Feb2013

NASA-KSC

6

## Cryogenics and Energy

- Cryogenics is all about energy\*
  - Conservation
  - Control
  - Conservation and control
- Thermal insulation systems minimize and/or control the energy flow (heat leakage rate)

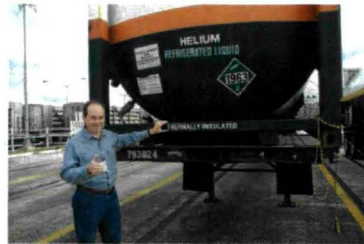

\*Thermal (Heat) Energy = \$\$\$

27Feb2013

NASA-KSC

7

## What is Energy?

- No one really knows, but whatever it is, it is conserved.
- Energy is *described* as the ability to do work:
  - ✧ ἐνέργεια - *energeia* (activity, operation)
  - ✧ ἐνεργός - *energós* (active, working)
- Until the 1800's scientists were still looking for one as the "caloric" was thought to be a substance, but no one has ever seen a joule!
- Energy and mass (Einstein - 1905):  $E = mc^2$
- Energy and time (Noether - 1915):
  - ✧ *The law of conservation of energy is the direct mathematical consequence of the translational symmetry of the quantity conjugate to energy, namely time. That is, energy is conserved because the laws of physics do not distinguish between different moments of time.*

27Feb2013

NASA-KSC

8



## Four Laws of Thermodynamics

**0<sup>th</sup> Law:** "If two systems are each in thermal equilibrium with a third, they are also in equilibrium with each other"

✧ The notion of Temperature!

**1<sup>st</sup> Law:** We don't really know what energy is, but whatever it is, it is always conserved

**2<sup>nd</sup> Law:** Heat energy flows from the hot side to the cold side

✧ There is a direction to the energy flow

✧ Entropy (disorder) is always increasing

**3<sup>rd</sup> Law:** Absolute zero is a hard stop

27Feb2013

NASA-KSC

9

## What is Temperature?

- What is temperature?
  - Hotness or coldness.
- What is hotness or coldness?
  - Temperature.



- Temperature is measured in kelvin (K), Celsius (°C), and Fahrenheit (°F)
- Extremes:
  - Absolute zero (0 K) is unique and foundational in the universe
  - There is no absolute high temperature (no upper limit)


27Feb2013

NASA-KSC

10

## Temperature Ranges

1. Ambient or room temperature and up to about 423 K (300 °F)
2. Refrigeration, below ambient and down to about 200 K (-100 °F)
3. Cryogenic, below 123 K (-238 °F) and down to 0 K (-460 °F)

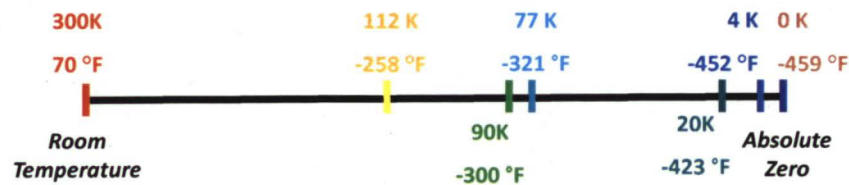


*Often in cryogenic engineering, it's not the low temperature that is the problem, it's the high temperature!*

27Feb2013


NASA-KSC



11



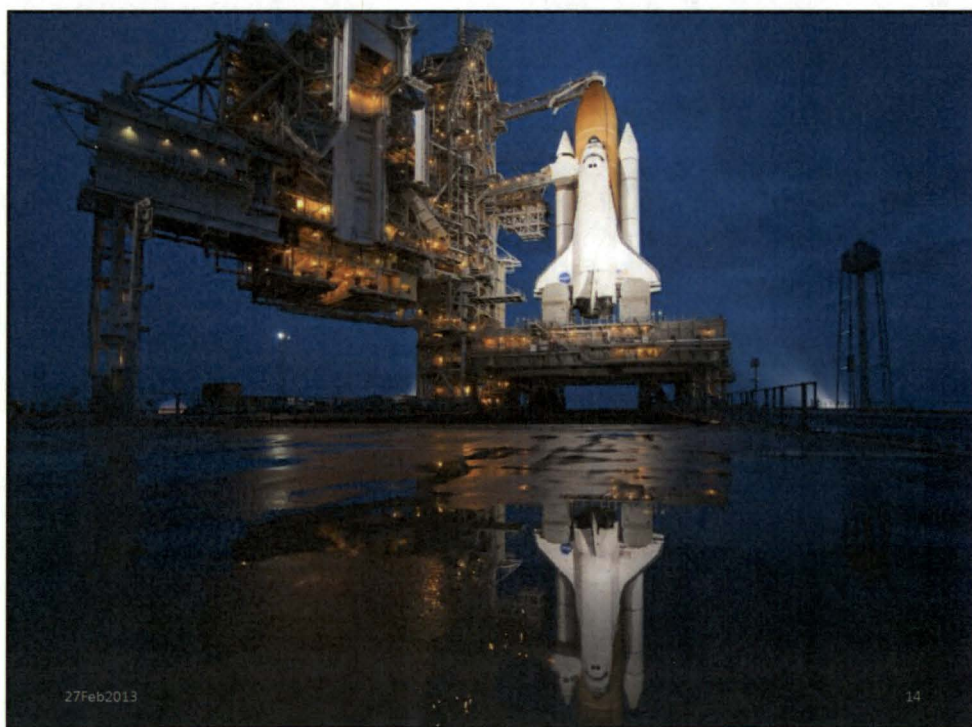




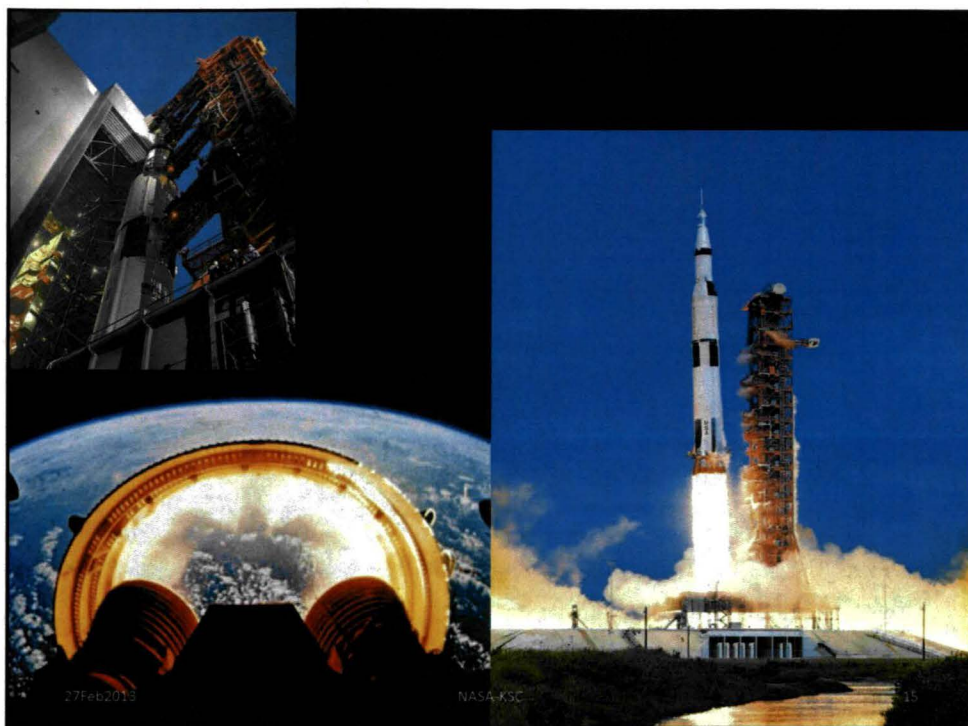

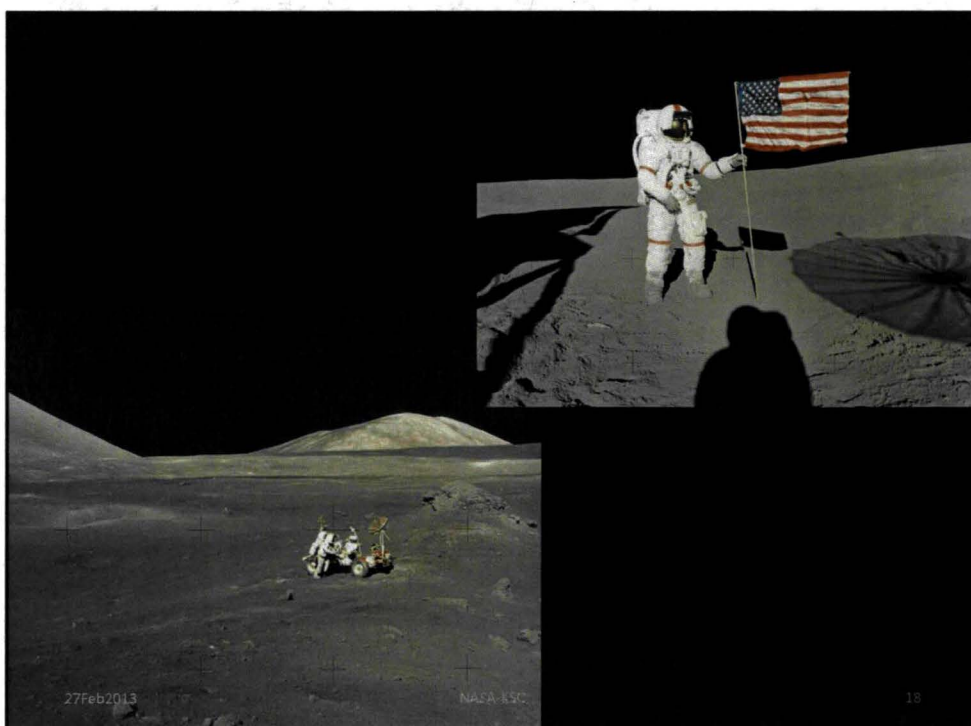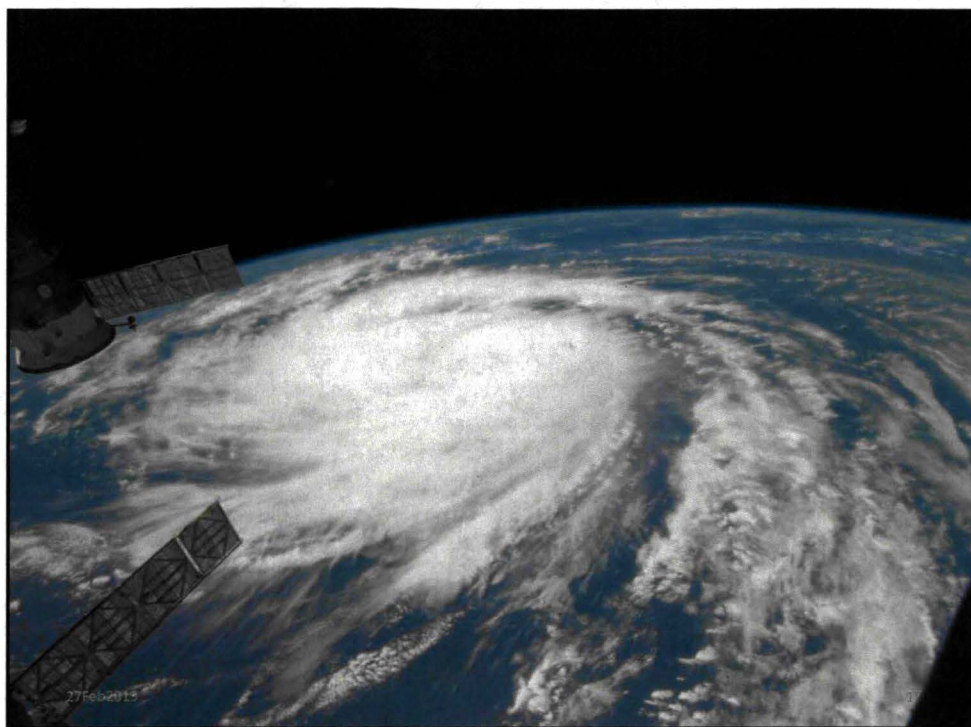






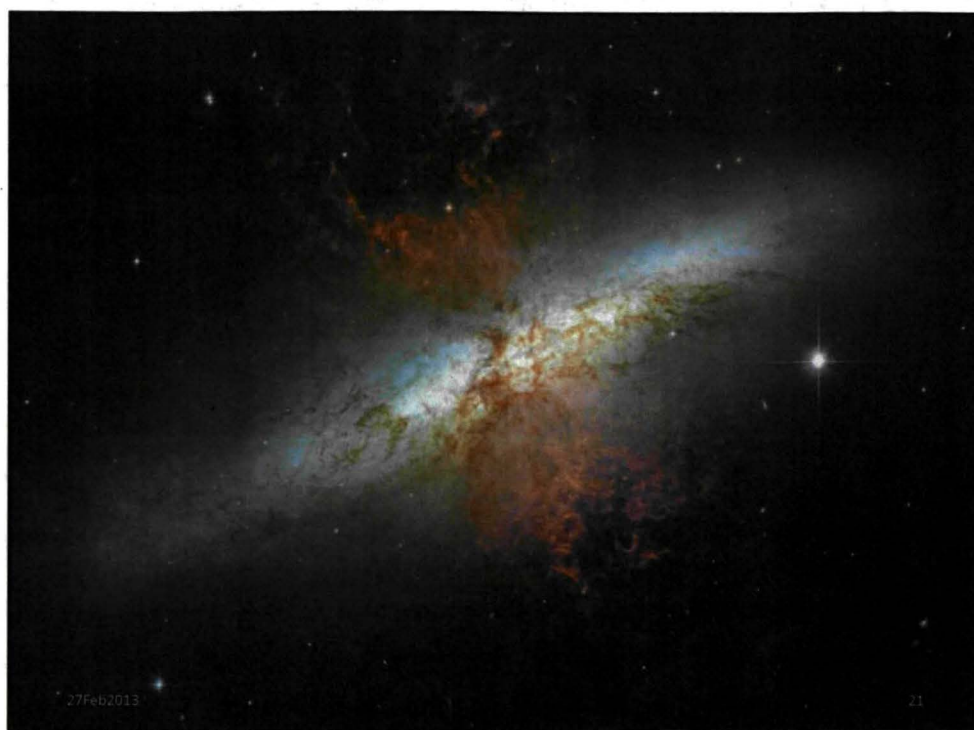





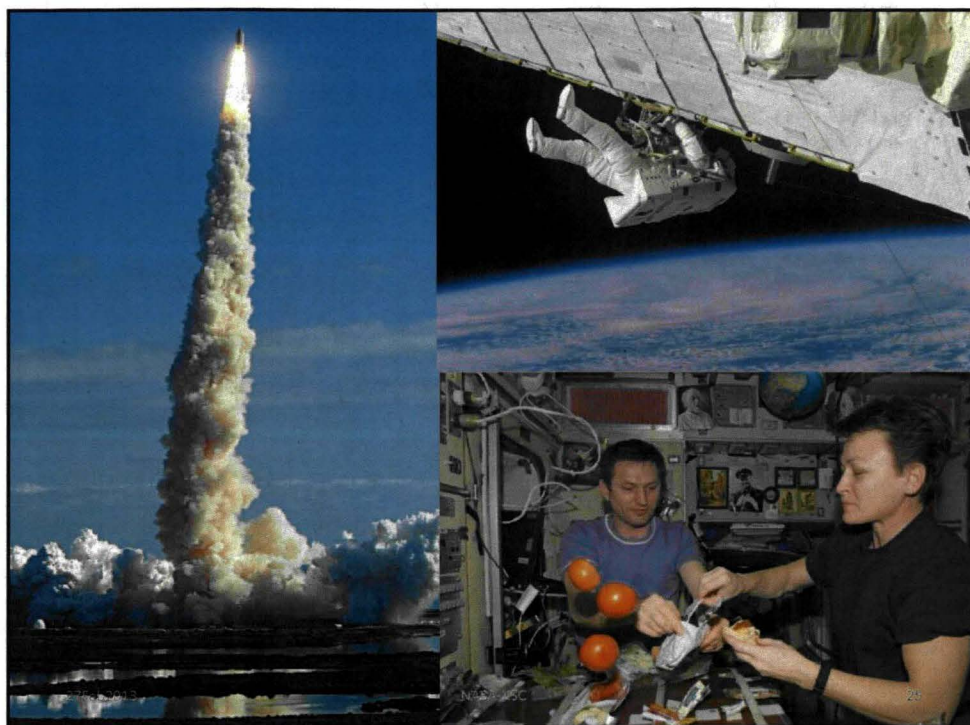







## II. Thermal Insulation Standards

27Feb2013

NASA-KSC

29

**Who cares about  
insulation  
?**

***everyone!***


27Feb2013





NASA-KSC

30

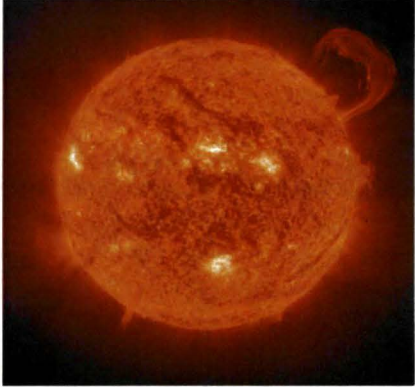Cryogenics Test Lab

## Heat is the Enemy



27Feb2013

Cryogenics Test Lab

## Thermal Insulation Systems

Technical Areas for Standards:

- ☐ Materials thermophysical data
- ☐ Testing equipment and methods
- ☐ Application practices and methodologies

27Feb2013

NASA-KSC

32

## Technical Consensus Standards

- To help meet the today's needs and further the possibilities for future gains in *global energy efficiency*, work on developing cryogenic insulation standards is well underway.
- Under ASTM International's Committee C16 on Thermal Insulation, two Task Groups have been established in the area of cryogenic thermal insulation systems:
  - ASTM WK29609 - *New Standard for Thermal Performance Testing of Cryogenic Insulation Systems*
    - Balloted in November 2012
  - ASTM WK29608 - *Standard Practice for Multilayer Insulation in Cryogenic Service*
    - Balloted in January 2013



27Feb2013

NASA-KSC

33

## Insulation Materials/Systems

- Foams
  - Polystyrenes (Styrofoams)
  - Polyimides
  - Polyurethanes
  - Phenolics
- Aerogels
  - Flexible blanket [Aspen Aerogels, Inc.]
  - Particles and expansion packs [Cabot Corp.]
  - Polymer cross-linked aerogels (X-aerogels) and experimental
- Bulk-Fill Powders
  - Glass bubbles, Perlites, Aerogels
- Multilayer insulation (MLI)
- Layered composite insulation (LCI)
- Structural and multifunctional composites
- Vacuum insulated panels (VIP)
- Phase change materials (PCM)

27Feb2013

NASA-KSC

34





## New Aerogel-Based Composites

- AeroFoams
- AeroPlastics
- Layered Composite Insulation (LCI)
- Patents:
  - US Patent 7,977,411, "Foam / Aerogel Composite Materials for Thermal and Acoustic Insulation and Cryogen Storage"
  - US Patent 7,790,787, "Aerogel / Polymer Composite Materials"
  - US Patent 7,781,492, "Foam / Aerogel Composite Materials for Thermal and Acoustic Insulation and Cryogen Storage"
  - US Patent 6,967,051, "Thermal Insulation Systems"

27Feb2013

NASA-KSC

37

## Representative k-values

Material and Density	HV <10 <sup>-4</sup> torr	SV 1 torr	NV 760 torr
Vacuum, polished surfaces	0.5 to 5		
Nitrogen gas at 200 K			18.7
Fiberglass, 16 kg/m <sup>3</sup>	2	14	22
PU foam, 32 kg/m <sup>3</sup>			21
Cellular glass foam, 128 kg/m <sup>3</sup>			33
Perlite powder, 128 kg/m <sup>3</sup>	1	16	32
Aerogel beads, 80 kg/m <sup>3</sup>	1.1	5.4	11
Aerogel composite blanket, 125 kg/m <sup>3</sup>	0.6	3.4	12
MLI, foil and paper, 60 layers, 79 kg/m <sup>3</sup>	0.09	10	~24
<b>New! LCI, 30 layers, 78 kg/m<sup>3</sup></b>	<b>0.09</b>	<b>1.6</b>	<b>14</b>


Boundary temperatures of approx. 293 K and 77 K; residual gas is nitrogen; k-value in mW/m-K.

27Feb2013

NASA-KSC

38



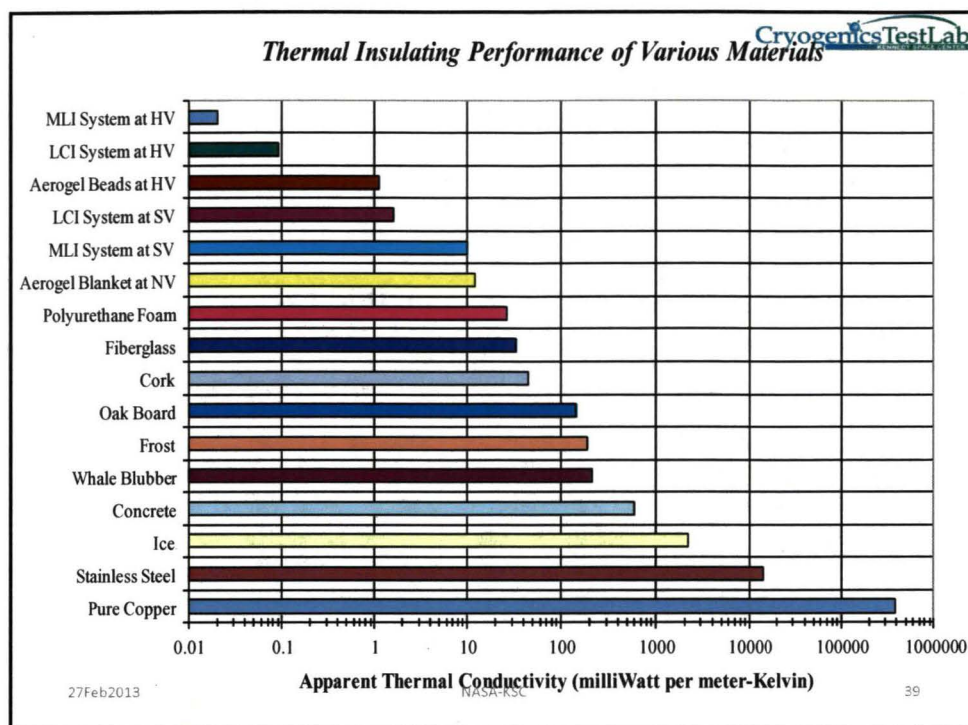

Cryogenics Test Lab

## Cold Power!

- **Uniformity of cold:** temperature [K]
  - Preparation of parts and how they are assembled
  - Orientation (gravity – convection)
  - Mechanical vibrations
- **Amount of cold:** energy [J]
  - Thermal mass (heat capacity)
  - Entire package plus contents
- **Longevity of cold:** power [W]
  - Time to reach overall equilibrium
  - Time until ambient heating ramp

27Feb2013 NASA-KSC 40

## Cryostat Insulation Test Instruments

- Cryostat-100, Cylindrical – Absolute
- Cryostat-200, Cylindrical – Comparative
- Cryostat-400, Flat Plate – Comparative
- Cryostat-500, Flat Plate – Absolute
- Macroflash (Cup Cryostat)
- Cryogenic Moisture Uptake Apparatus
- Transient Thermal Tester
- ASTM WK29609:
  - *New Guide for Thermal Performance Testing of Cryogenic Insulation Systems*
- Patents:
  - US Patent 6,742,926 *Methods of Testing Thermal Insulation and Associated Test Apparatus*
  - US Patent 6,487,866 *Multi-purpose Thermal Insulation Test Apparatus*
  - US Patent 6,824,306 *Thermal Insulation Testing Method and Apparatus*
  - *Additional patents pending*



27Feb2013

NASA-KSC

41

## Insulation Test Cryostats: *Basic Characteristics*

Steady-state boil-off calorimeter methods

Full temperature difference ( $\Delta T$ ):

- Cold boundary temperature (CBT) = 78K (to 200K)
- Warm boundary temp (WBT) = 293K (to 400K)

Full-range cold vacuum pressure (CVP):

- High vacuum (HV)  $<10^{-5}$  torr
- Soft vacuum (SV) =  $\sim 1$  torr
- No vacuum (NV) = 760 torr

Thermal testing under actual-use conditions:

- Research of new materials
- Insulation system testing
- Heat transfer mechanisms
- Experimental methodologies
- Installation methods

27Feb2013


NASA-KSC

42

## Cryostat-100

Cryogenics Test Lab

- Liquid nitrogen boil-off calorimetry
- Absolute k-value [ $\text{mW/m-K}$ ] and heat flux [ $\text{W/m}^2$ ]
- 0.01 to 60  $\text{mW/m-K}$  and 0.1 to 500  $\text{W/m}^2$
- Cylindrical: 6.57" diameter by 40" length cold mass
- Full delta-T, full-range cold vacuum pressure
- Foams, powders, bulk-fill, clam-shell, blankets, and MLI materials

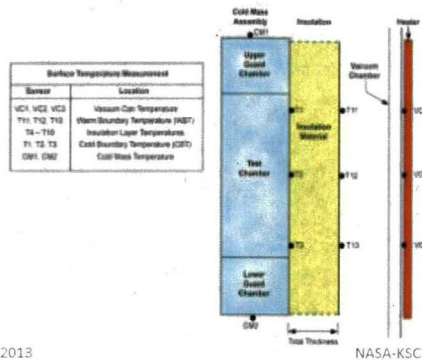


27Feb2013



43

## Cryostat-100

Cryogenics Test Lab

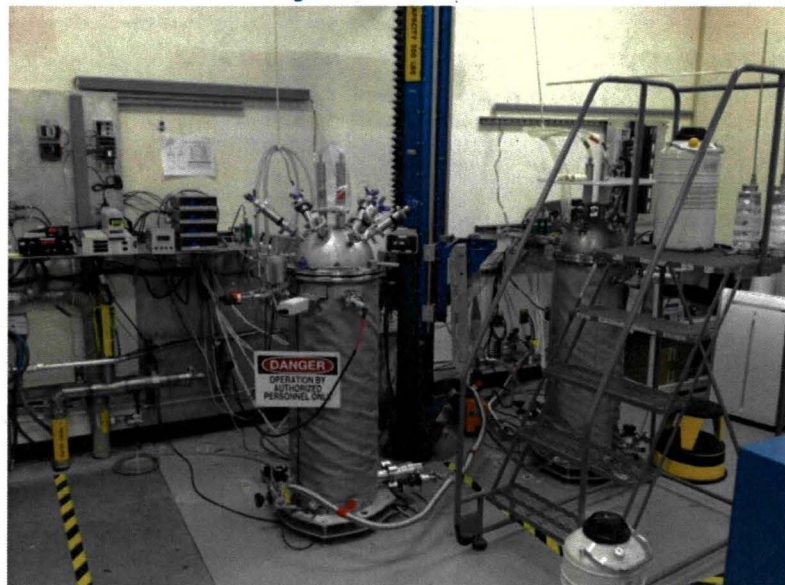

27Feb2013

NASA-KSC


44




## Cryostat-200

Cryogenics Test Lab

- Liquid nitrogen boil-off calorimetry
- Comparative k-value [ $\text{mW/m-K}$ ] and heat flux [ $\text{W/m}^2$ ]
- 0.1 to 50  $\text{mW/m-K}$  and 2 to 400  $\text{W/m}^2$
- Cylindrical: 5.2" diameter by 20" length cold mass
- Full delta-T, full-range cold vacuum pressure
- Foams, powders, bulk-fill, clam-shell, blankets, and MLI materials



27Feb2013



NASA-KSC

45


## Cryostat-500

Cryogenics Test Lab

- Liquid nitrogen boil-off calorimetry
- Absolute k-value [ $\text{mW/m-K}$ ] and heat flux [ $\text{W/m}^2$ ]
- 0.1 to 100  $\text{mW/m-K}$  and 1 to 1000  $\text{W/m}^2$
- Flat plate (disk): 8" diameter by up to 1.5" thickness
- Full delta-T, full-range cold vacuum pressure
- Foams, bulk-fill, blankets, MLI, panels, and composite materials



27Feb2013

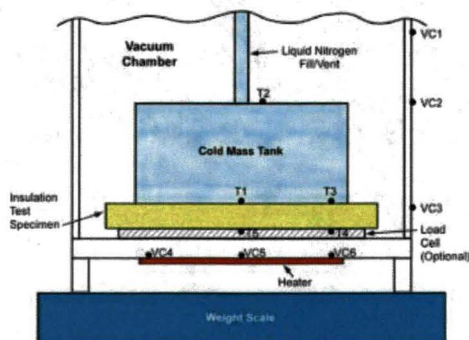


NASA-KSC

46

## Various Cryogenic Insulation Materials

Cryogenics Test Lab

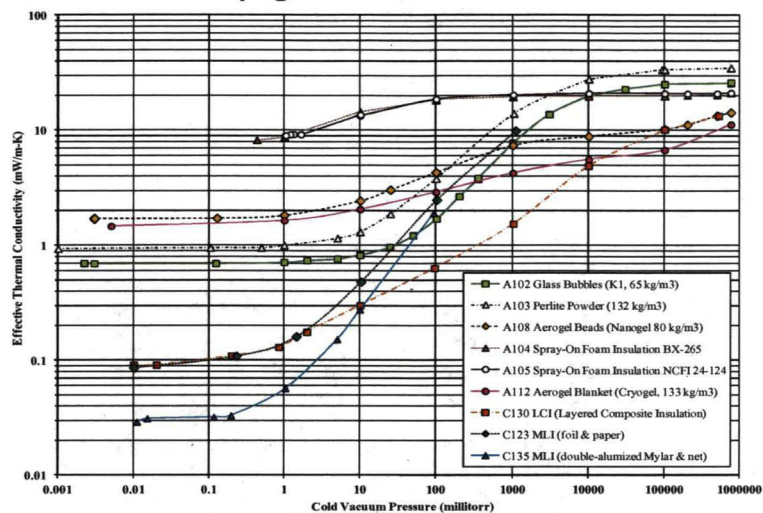

Examples of the variation of effective thermal conductivity ( $k_e$ ) with cold vacuum pressure are shown for different cryogenic insulation systems. The boundary temperatures are approximately 78 K and 293 K, the residual gas is nitrogen, and the total thicknesses are typically 25-mm.<sup>1</sup>

<sup>1</sup>Fearnley, J. E., Coffman, B. E., Meneghelli, B. J., Heckle, K. W., "Spray-On Foam Insulations for Launch Vehicle Cryogenic Tanks," Cryogenics, doi:10.1016/j.cryogenics.2012.01.018, 27Feb2013 NASA-KSC 47

## Flexible Aerogel Blanket

Cryogenics Test Lab



Space Technology  
Hall of Fame  
2012



27Feb2013

NASA-KSC



Aerogel blanket insulation systems are used on a number of systems on the launch tower, the vehicle umbilicals, and inside the Shuttle.



27Feb2013

49

Troubleshooting of Space Shuttle External Tank Liquid Hydrogen Engine Cut-Off (ECO) sensor using cold helium test fixture with aerogel blanket insulation system. CryoTestLab of NASA-KSC.



27Feb2013

50

## Space Cold Chain: GLACIER



*On-orbit low-temperature science storage facility as well as cold stowage transportation to and from orbit. Incorporates aerogel blanket materials for thermal insulation.*

- ✓ Selectable temperature range from  $-160^{\circ}\text{C}$  to  $+4^{\circ}\text{C}$
- ✓ Heat rejection power  $\sim 375\text{W}$  at  $-160^{\circ}\text{C}$  minimum temperature
- ✓ Four trays each accommodate up to 2.8 liters (11.4 liters total volume)





27Feb2013

NASA-KSC

51

## Oil & Gas Industry

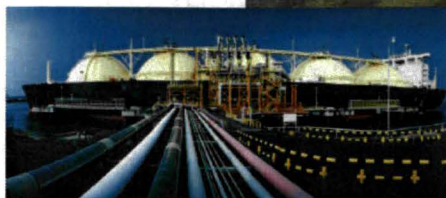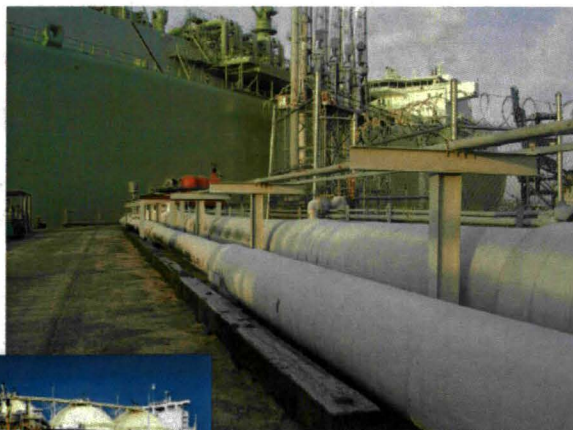

27Feb2013

NASA-KSC

52

Ann Parmenter, who summited Mt. Everest on May 25, 2006,  
wearing Toasty Feet aerogel blanket insoles



27Feb2013

NASA-KSC

53

### III. Efficient Storage


27Feb2013

NASA-KSC

54



## NASA Office of Chief Technologist

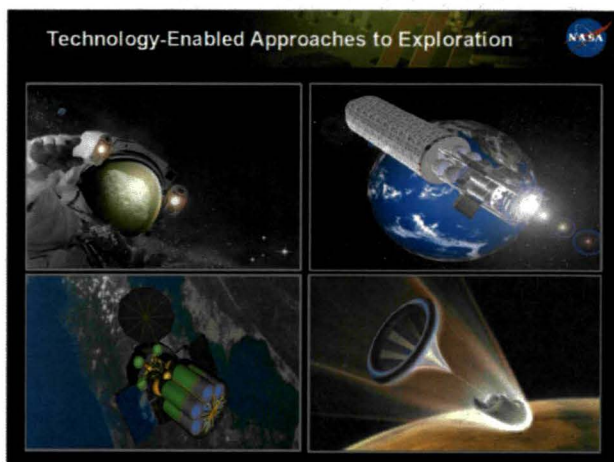

Technology-Enabled Approaches to Exploration

### Cryogenics Enables:

- ✓ Propulsion
- ✓ Power
- ✓ Life Support
- ✓ Science
- ✓ Manufacturing
- ✓ Testing

Exploring Space Through Innovation & Technology, B. Braun, 5/25/2011  
<http://www.nasa.gov/offices/oct/home/index.html>

27Feb2013

NASA-KSC

55

## Mass-Efficiency in Space



- ✓ Reduced Boil-off
  - Cryocoolers Integration
  - Structural Materials
  - Thermal Insulation Systems
- ✓ Zero-gravity Control
- ✓ Multilayer Insulation Systems
  - New materials characterization
  - Test methodologies
  - Thermal modeling and analysis
  - Micro-meteoroid Orbital Debris (MMOD) Shielding
  - Launch Pad Ground Hold Considerations
  - Launch Ascent Considerations




27Feb2013

NASA-KSC

56

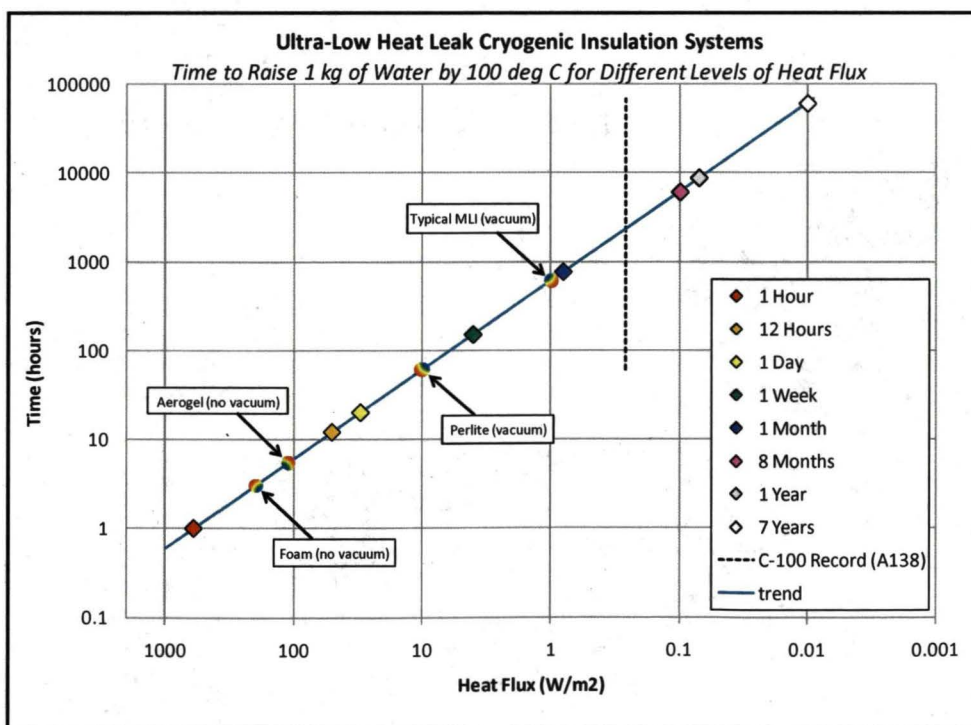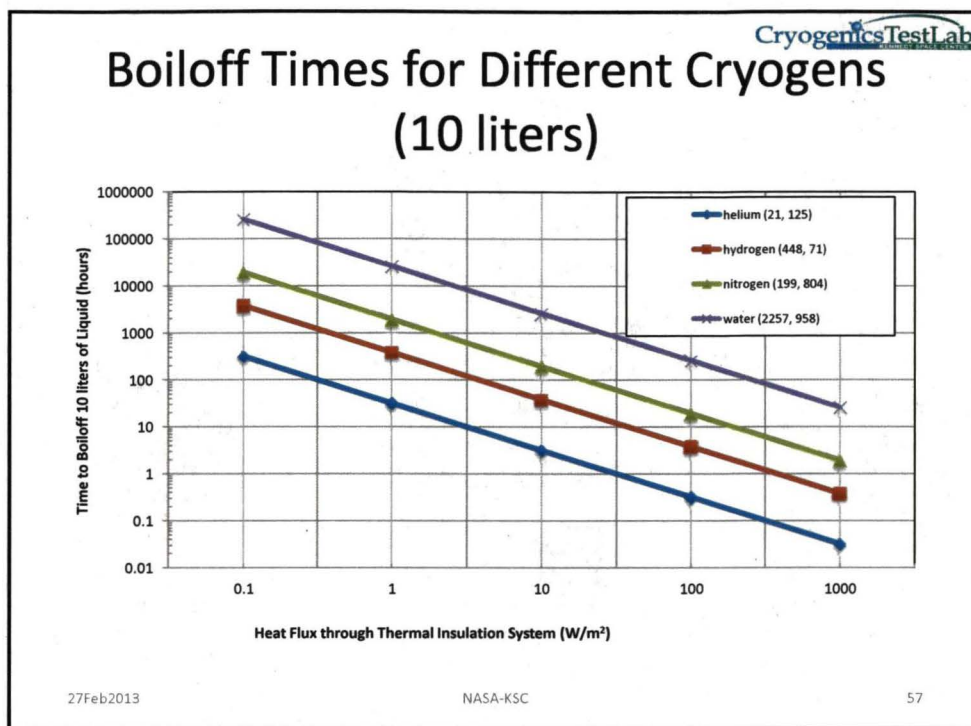


## Cost-Efficiency on Earth



Materials Research



Demonstration Testing



System Studies


*Global positive impact for energy efficiency and cost savings.*

27Feb2013




NASA-KSC

59

## Full-scale Application of Glass Bubbles Insulation for Liquid Hydrogen Storage Tanks



**50 %** less boil-off  
losses compared to  
perlite under real-world  
conditions

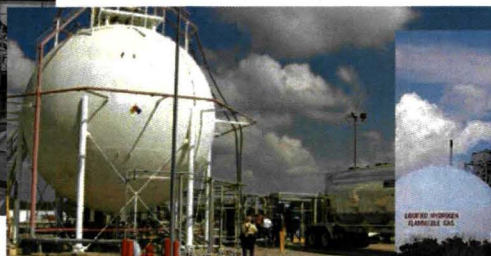







27Feb2013

60



## 1000-liter Tank Demonstration Testing

Cryogenics Test Lab



27Feb2013



NASA-KSC

61

## Internal Tank Wall Temperature Measurement

Cryogenics Test Lab

Excellent indicator of liquid level  
Approximate indicator of ullage temperature  
Used to anchor the liquid-wall  $h_c$  in thermal modeling

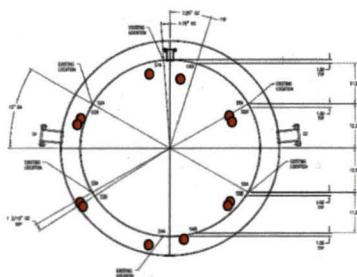


Silicon Diode Installation with  
Radiant Shield Removed

27Feb2013

A close look reveals that the  
inner wall temperature varies  
with atmospheric pressure  
at two cycles per day



### Silicon Diode Temperatures

\* CBT 100%    \* CBT 82%    \* CBT 13.4%  
 \* CBT 99.9%    \* CBT 82%    \* CBT 0%  
 \* CBT 84.4%    \* CBT 15.6%

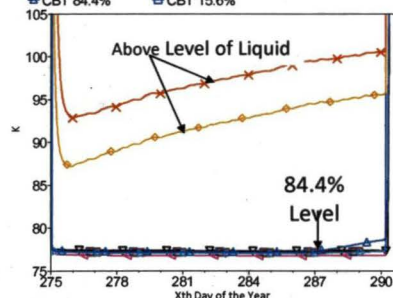

NASA-KSC


## Insulation Temperature Gradient Measurement



27Feb2013

Majority of insulation is near ambient temperature  
Varies with ambient temperature at one cycle per day

### Temperature Rake Thermocouples

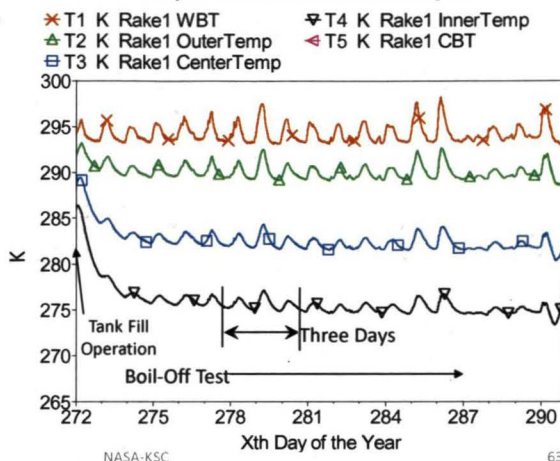


NASA-KSC

63

## Thermal Performance of Glass Bubbles vs. Perlite Powder

- ◆ Thermal performance of glass bubbles and perlite in the 1000 L tanks is very similar to cryostat test data
- ◆ Bubbles out perform perlite at 1  $\mu$ , even better in the 10-150  $\mu$  range
- ◆ Performance of bubbles at 50  $\mu$  is equivalent to perlite at 1  $\mu$

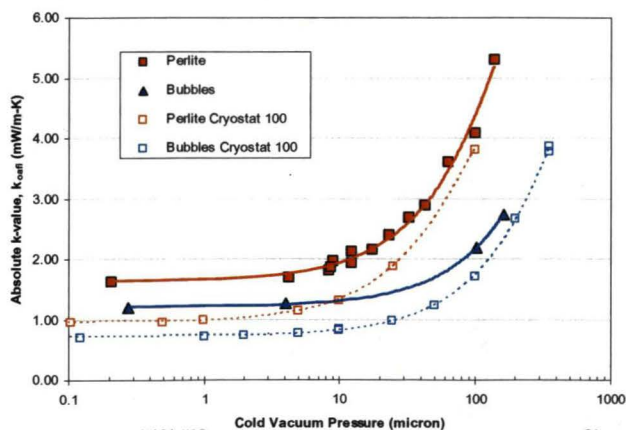

27Feb2013

NASA-KSC

64

## The Hydrogen Economy



27Feb2013

NASA-KSC

65

## Hydrogen Storage Options (Ambient Temperature)

- **Compressed gas**
- **Metal hydrides**
- **Nanomaterials**
- **Other novel concepts**


27Feb2013

NASA-KSC

66



## Compressed Gas



27Feb2013

NASA-KSC

67

## Metal Hydrides

DOE target for 2010 = 6 wt%



"Developed by H Bank in 2000, our patented alloy compositions are able to absorb hydrogen as high as 1.65 wt%"



Ref: [http://www.fuelcellmarkets.com/fuel\\_cell\\_markets/1,1,1.html](http://www.fuelcellmarkets.com/fuel_cell_markets/1,1,1.html)

27Feb2013

NASA-KSC

68


## Nanomaterials

Complex chemical hydrides now exist that store hydrogen in concentrations that are above 10 wt%

Cella Energy developed method using a low-cost process called coaxial electrospinning or electrospinning that can trap a complex chemical hydride inside a nano-porous polymer

The coaxial electrospinning process is simple and industrially scalable to create micron scale micro-fibres or micro-beads nano-porous polymers filled with the chemical hydride.

Ref: <http://www.cellaenergy.com/index.php?page=technology>



27Feb2013

NASA-KSC

69

## Hydrogen Storage Options (Cryogenic Temperature)

**Liquid**

**Cryo-compressed**


**Nanomaterials**

**Other novel concepts**

27Feb2013

NASA-KSC

70

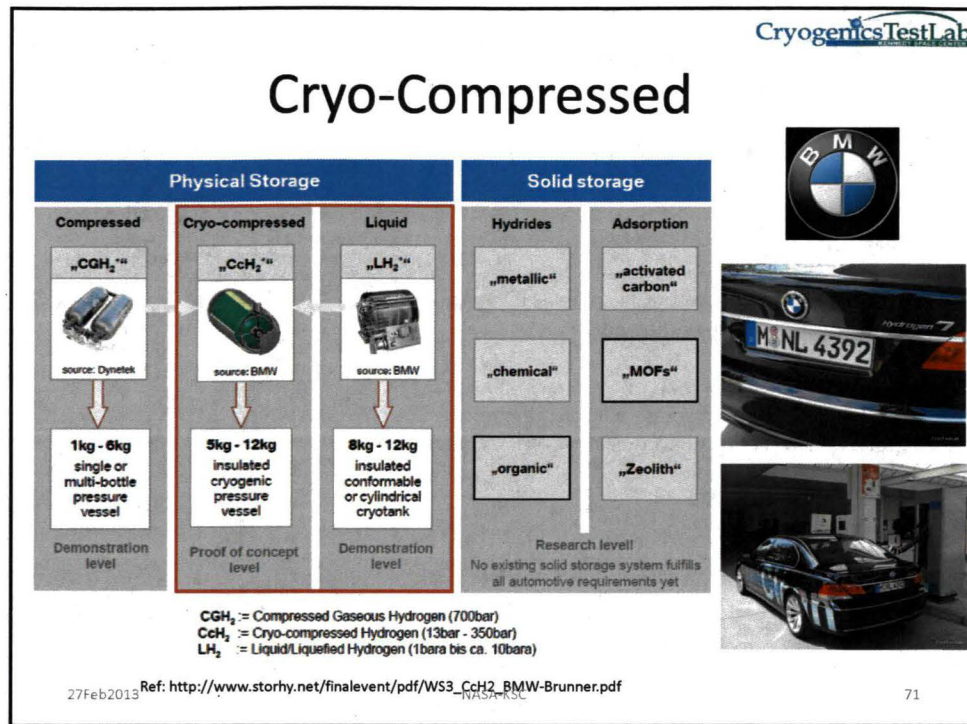

71

CryogenicsTestLab

## Cryo-compressed

**Advantages over liquid storage:**

- Single-phase fluid for simplicity in operation
- Longer stand-by times
- Can accept GH2 or LH2

**But what about density?:**

- Higher density compared to LH2
- Effective (usable) density is about 50% more than LH2 at normal boiling point
  - LH2 tanks are not operated at saturated conditions
  - No lost volume due to ullage space

27Feb2013 NASA-KSC


72



## Nanomaterials: AeroFoam

- **AeroFoam is a composite material**
  1. Organic polymeric cellular solid material
  2. Inorganic or organic aerogel or xerogel filler that is physically held in place by the "foam"
- Organic foam material strengthens the aerogel
- Aerogel reduces the heat transfer within the foam

Foam micrograph – cellular structure

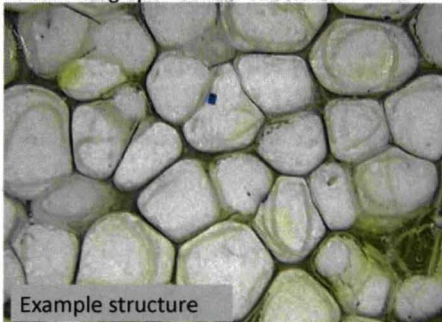

Filler photo – translucent aerogel granules



27Feb2013

US Patent 7781492 Foam/aerogel composite materials for thermal and acoustic insulation and cryogen storage

NASA-KSC

73

## Early Hydrogen History

- 1670 – Boyle produced hydrogen
- 1898 – Dewar liquefied hydrogen
- 1909 – Linde process for LH2 production
- 1943 – Test of LH2 for rocket fuel at Ohio State Univ.
- 1952 – First non-refrigerated transport tank (Johnston) for thermonuclear research by AEC
- 1954 – First test of LH2 rocket engine by NACA
- 1955 – Large scale LH2 production at NBS-Boulder
- 1956 – First LH2 tanker trailer (U-1)
- 1957 – Extensive cryogenic engineering and materials R&D produced by NBS-Boulder, MIT, and OSU
- 1957 – Mama Bear on-line at West Palm Beach (4,500 kg/day)
- 1959 – Papa Bear on-line at West Palm Beach (27,200 kg/day)
- 1959 – New space program: LH2 work accelerates through the 1960s

Ref: <http://history.nasa.gov/SP-4404/contents.htm>


27Feb2013

NASA-KSC


74

## Large-Scale LH2


Cryogenics Test Lab

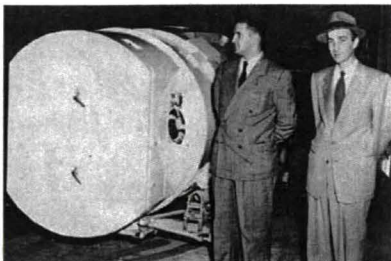

- Air-transportable dewar for 750 liters of liquid hydrogen developed by H.L. Johnston. ca. 1952.
- First LN<sub>2</sub> shielded vessel (77 K radiation shield).

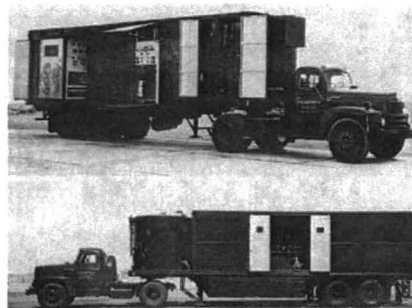

- The U-1 semi-trailer (top) first used to haul liquid hydrogen (1956).
- Built by the Cambridge Corporation, it had a capacity of 26,500 liters, with a loss rate of ~ 2 % per day.



- Mobile hydrogen liquefier developed for the Air Force by H. L. Johnston, Inc. in 1953.
- Mounted on three semi-trailers and capable of producing 100 liters per hour of 45 % liquid parahydrogen.
- Gross weight was 25 metric tons; required 105 kW of electric power for operation.


27Feb

75

## Enabling Technology of Insulation

Cryogenics Test Lab


March 12, 1946. L. I. DANA 2,396,459  
INSULATED CONTAINER FOR LIQUEFIED GASES AND THE LIKE  
Original Filed Dec. 7, 1939 2 Sheets-Sheet 1




### Key Ingredients:

- Welding & metallurgy for high vacuum
- Multilayer Insulation (MLI)
- Getters & adsorbents
- Seals (Teflon)

June 23, 1953 W. D. CORNELL 2,643,022  
INSULATION SHEILD SUPPORTED IN TUBULAR ENCLOSED CONTAINER  
Filed Aug. 15, 1947 2 Sheets-Sheet 1



Nov. 7, 1961 L. C. MATSCH 3,007,596  
THERMAL INSULATION  
Filed July 16, 1960



27Feb

76

## IV. Efficient Transfer

27Feb2013

NASA-KSC

77

## Advanced Cryogenic Transfer

- Autonomous control and system health monitoring
- End-to-end system architectures for rapid and reliable operations
- Modular, semi-flexible piping systems
- Zero-loss transfer of Liquid Hydrogen

27Feb2013

NASA-KSC

78



## Rapid and Autonomous Loading of Cryogenic Propellants



Overall view of the Simulated Propellant Loading System located at the CryoTestLab

27Feb2013

NASA-KSC

79

### •Objectives:

- Rapid propellant loading concept demonstrations.
- Autonomous control and data monitoring system development.
- Testbed for development of many technologies and innovations, such as:
  - Fault tolerance of failed control valves and sensors.
  - Software to monitor the overall health and status of the propellant loading system.
  - Globe valve seal designs.

### •Features:

- Up to 800 GPM flow rate and 225 PSI.
- Four cryogenic pumps are fed from a 6,000 gallon liquid nitrogen supply tank.
- Pumps have varying flow capacities from 25 up to 450 GPM.
- Complexity and component count is comparable to full scale launch pad transfer system
- Modular and re-configurable for a wide range of different vehicle or R&D requirements.


## Cryogenic Pipeline Test Apparatus

- New apparatus and method for thermal performance testing of cryogenic piping systems
- Accurate heat leak data for full-scale cryogenic pipelines and connections under actual field conditions
- 12-m-long test articles (two each)

27Feb2013

NASA-KSC

80

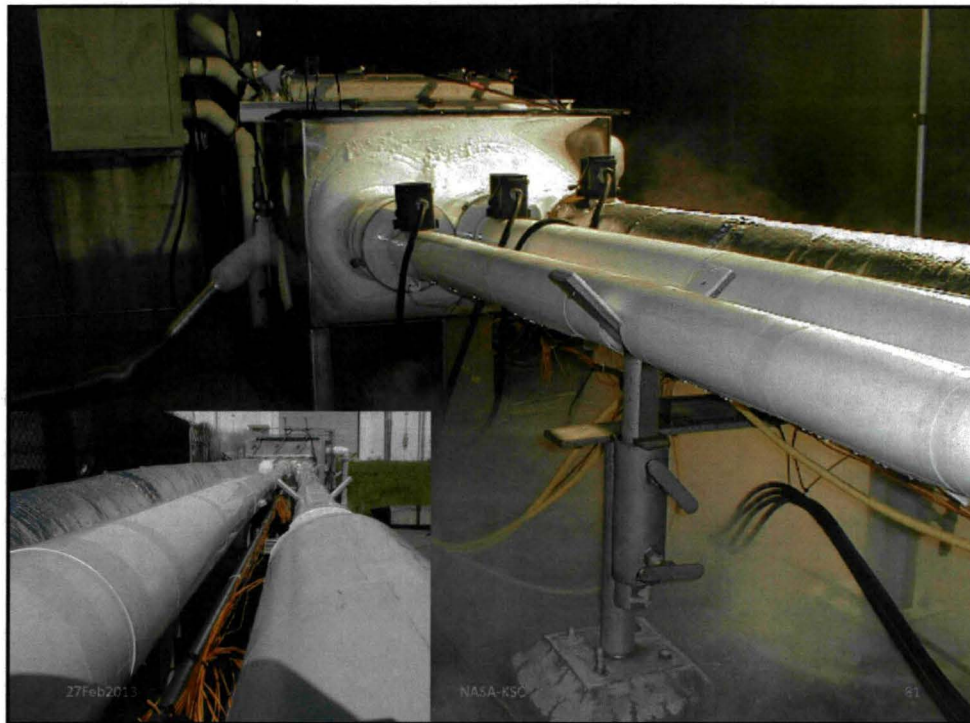

## Long Flexible Cryostat for Superconducting Power Cables

Cryogenics Test Lab

### Cryostat Development

- 5 Meter-long prototypes
- Hand-made
- Optimize Multi-Layer Insulation (MLI) and spacer design
- Performance target for 40 mm diameter class cryostat is 1 W/m heat leak and 5 W/m<sup>2</sup> heat flux

### Tests

- Vacuum retention
- Thermal performance
  - Boiloff
  - Flow-through



27Feb2013

NASA-KSC


82

## Prototype Fabrication

Cryogenics Test Lab

### Two Prototypes Fabricated

- Low-layer density (MLI = 1.7 layers/mm)
- High-layer density (MLI = 2.8 layers/mm)
- Length = 5 meters
- Everything else the same



PREP INNER-WALL



HAND-WRAP MLI



SPACER RODS

27Feb2013

NASA-KSC

83

## Prototype Fabrication


Cryogenics Test Lab



PREP OUTER-WALL



ASSEMBLE INNER & OUTER



WELD

### Finishing Work

- Vacuum Leak Test (Helium mass spectrometer)
  - Leak Rates  $< 1 \times 10^{-8} \text{ cm}^3/\text{sec}$
- Vacuum Space Bake-out and Pumping
  - 373 K – Internal (flowing gas) and external heating (resistive heaters)
  - Warm Vacuum Pressure  $< 1$  millitorr

27Feb2013


NASA-KSC

84



## Thermal Performance: Boiloff Tests

CryogenicsTestLab

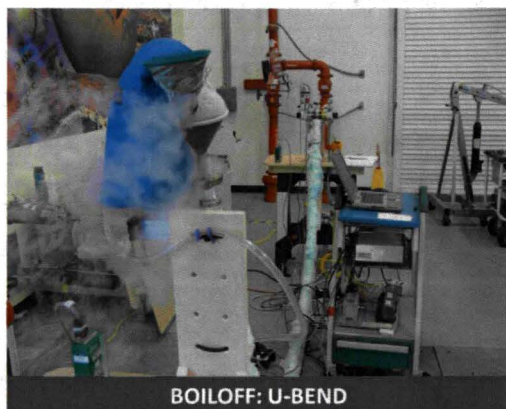

BOILOFF: U-BEND



BOILOFF: S-BEND

27Feb2013


NASA-KSC

85

## Thermal Performance: Boiloff Tests

CryogenicsTestLab

Boiloff Test Flow Summary for HLD 5-m Cryostat

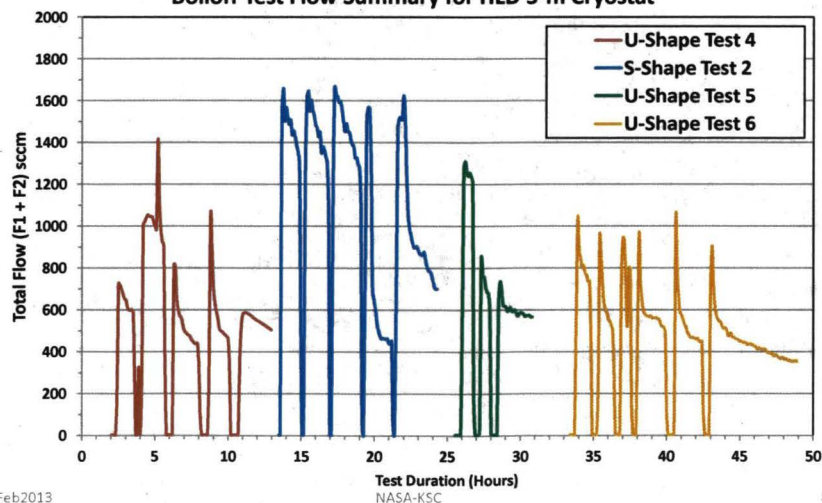


27Feb2013

NASA-KSC

86

## Thermal Performance: Boiloff Tests

Cryogenics Test Lab

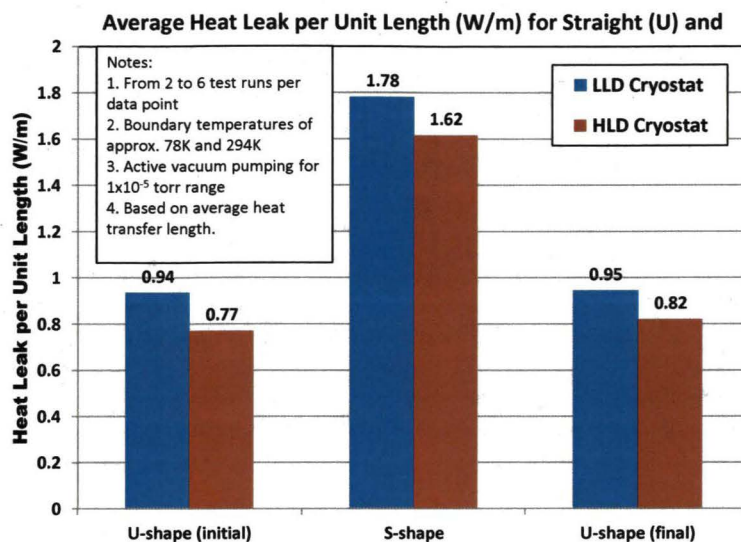


27Feb2013

NASA-KSC

87

## NASA Office of Chief Technologist

Cryogenics Test Lab

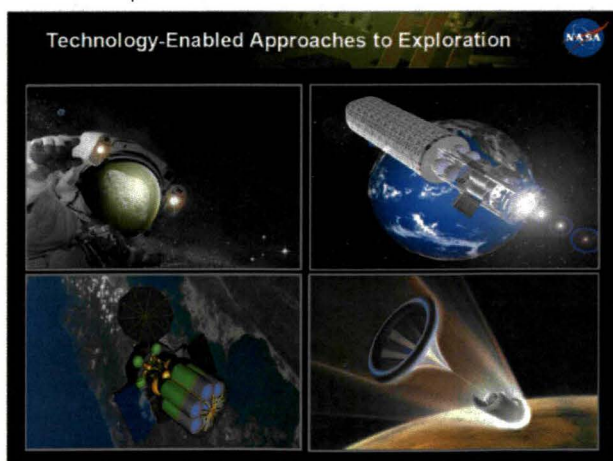

### Cryogenics Enables:

- ✓ Propulsion
- ✓ Power
- ✓ Life Support
- ✓ Science
- ✓ Manufacturing
- ✓ Testing

Exploring Space Through Innovation & Technology, B. Braun, 5/25/2011  
<http://www.nasa.gov/offices/oct/home/index.html>

27Feb2013

NASA-KSC

88


## V. Cryogenic Applications

27Feb2013

NASA-KSC

89

**The Space Shuttle External Tank: Key parts of the liquid oxygen feedline and the liquid hydrogen tank, where the Orbiter is connected, are shown on the right.**

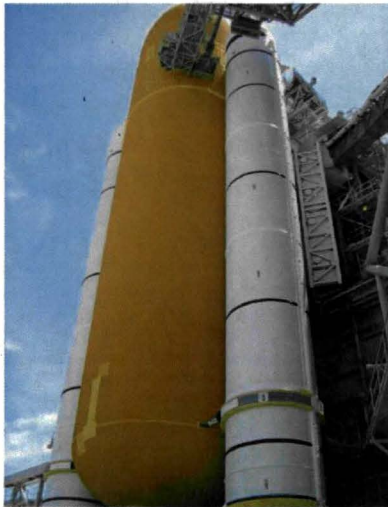

NASA-KSC

90



## Tests using a liquid helium tanker: aerogel insulation applications for Shuttle External Tank LH2

Cryogenics Test Lab



**Demonstration test unit**

### References:

1. Aerogel insulation systems for space launch applications, Cryogenics, Volume 46, Issues 2-3, Pages 111-117, Elsevier
2. Aerogel insulation applications for liquid hydrogen launch vehicle tanks, Cryogenics, Volume 48, Issues 5-6, Pages 223-231, Elsevier.




27Feb2013

NASA-KSC

91

## Cold finger experiment with no aerogel insulation inside tube



Cryogenics Test Lab

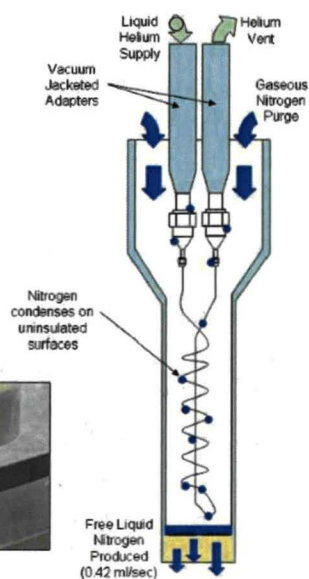

27Feb2013


NASA-KSC

92

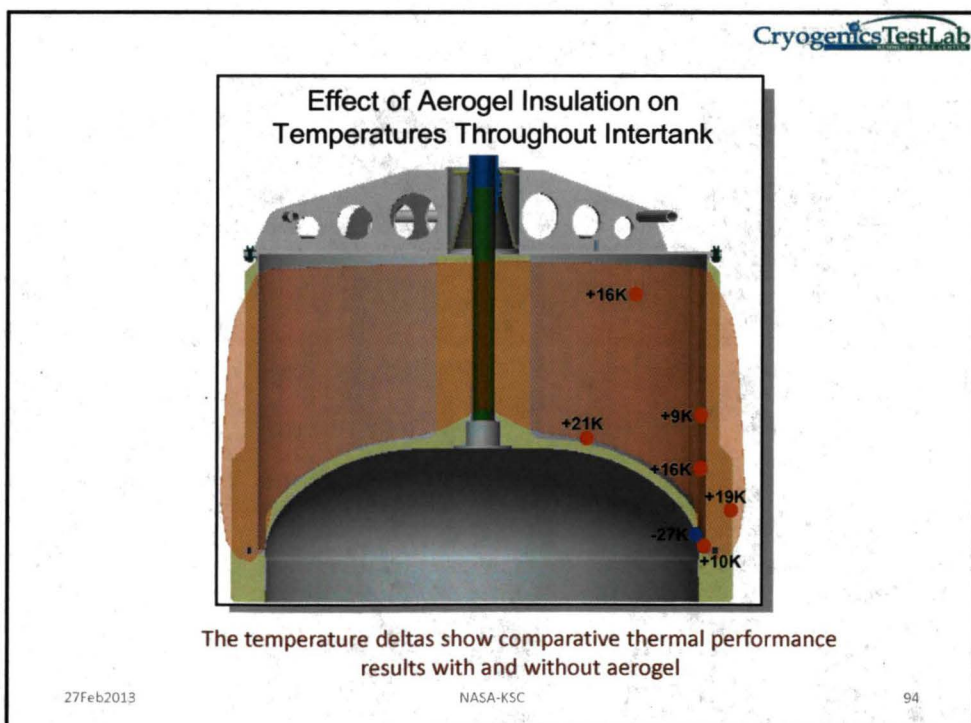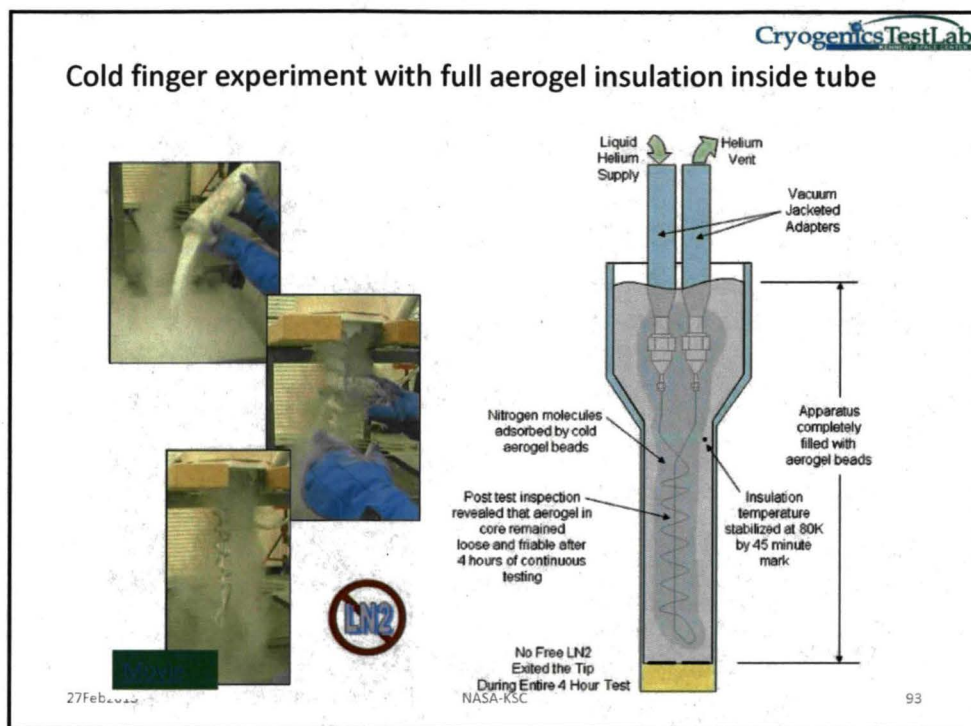


## Layered Composite Insulation Systems for Superconducting Power Cables

Cryogenics Test Lab

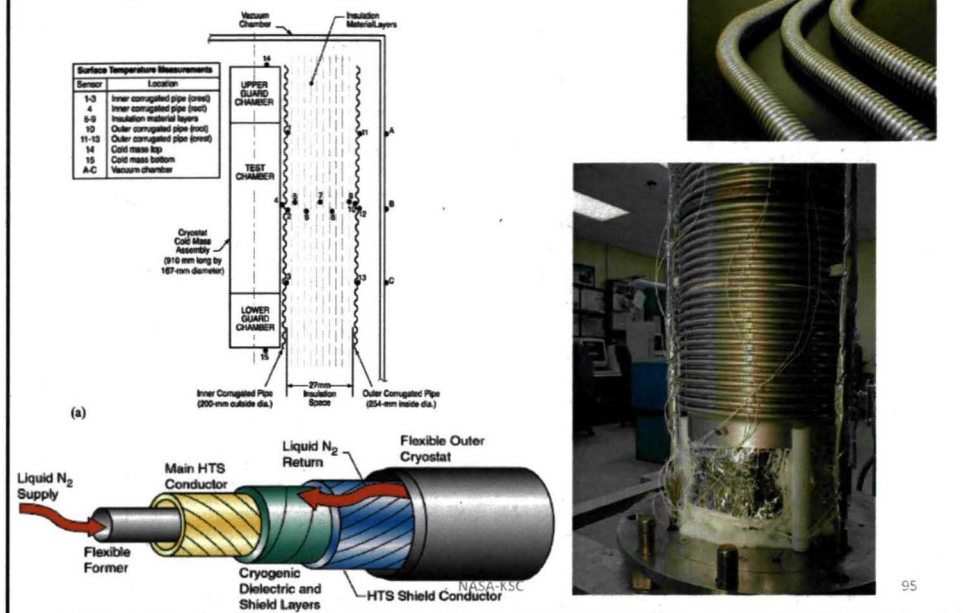

## Perforated MLI Blanket for LHC at CERN

Cryogenics Test Lab

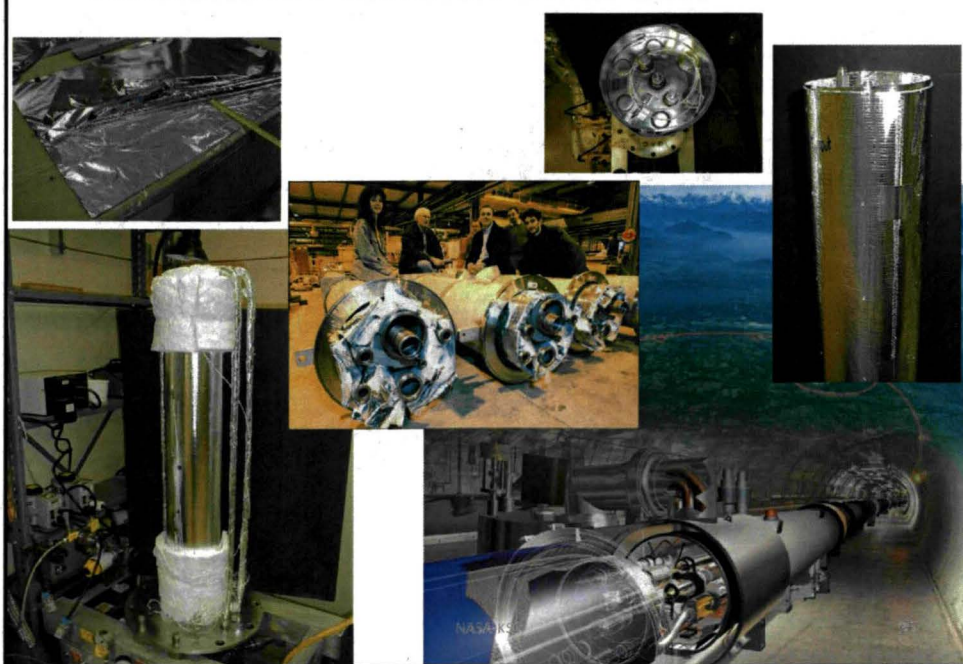



## Technology Challenges

- ✓ Small-size, high-performance tanks
- ✓ Simplified vacuum-jacketed piping system
- ✓ Semi-flexible piping products
- ✓ Problems with liquid solved (flow like water) or avoid liquid
- ✓ Testing capabilities using LH2
- ✓ Reduce dependency on helium purge systems
- ✓ Engineering & technical standards

27Feb2013

NASA-KSC

97

## Technology Synergies

- ✓ Ground transportation
- ✓ Space transportation and exploration
- ✓ Superconducting electrical power applications
- ✓ Industrial processes
- ✓ LNG and other energy sources
- ✓ Emerging medical applications

27Feb2013

NASA-KSC

98

## Conclusion

- Cryogenics is globally linked to energy generation, storage, and usage
- Thermal insulation systems research and development is an enabling part of NASA's technology goals for Space Launch and Exploration
- New thermal testing methodologies and materials are being transferred to industry for a wide range of commercial applications

*Through measurement to knowledge; through knowledge to product.*

27Feb2013

NASA-KSC

99



**Cryogenics Test Lab**  
KENNEDY SPACE CENTER



**Team**  
**QinetiQ**  
North America

**James E. Fesmire**

Sr. Principal Investigator

321-867-7557

james.e.fesmire@nasa.gov

27Feb2013

NASA-KSC

100

## Selected References

1. ASTM International Committee C16 on Thermal Insulation, Standards C168, C518, C177, C740, and WK29609, ASTM International, West Conshohocken, PA, USA.
2. Fesmire, J.E., Augustynowicz, S.D., Scholtens, B.E., and Heckle, K.W., "Thermal performance testing of cryogenic insulation systems," in Thermal Conductivity 29, DEStech Publications, Lancaster, PN, 2008, pp. 387-396.
3. Scholtens, B.E., Fesmire, J.E., Sass, J.P., and Augustynowicz, S.D., "Cryogenic thermal performance testing of bulk-fill and aerogel insulation materials," in Advances in Cryogenic Engineering, Vol. 53A, American Institute of Physics, New York, 2008, pp. 152-159.
4. Demko, J.A., Fesmire, J.E., and Augustynowicz, S.D., "Design tool for cryogenic thermal insulation systems," in Advances in Cryogenic Engineering, Vol. 53A, American Institute of Physics, New York, 2008, pp. 145-151.
5. Fesmire, J.E., "Aerogel insulation systems for space launch applications," *Cryogenics*, 46, issue 2-3, February 2006, pp. 111-117.
6. Fesmire, J. E., Coffman, B. E., Meneghelli, B. J., Heckle, K. W., "Spray-On Foam Insulations for Launch Vehicle Cryogenic Tanks," *Cryogenics*, doi:10.1016/j.cryogenics.2012.01.018.
7. Fesmire, J.E., et al., "Cryogenic Moisture Uptake in Foam Insulation for Space Launch Vehicles," *Journal of Spacecraft and Rockets*, March/April 2012.
8. Coffman, B.E., Fesmire, J.E., Augustynowicz, S.D., Gould, G., White, S., "Aerogel blanket insulation materials for cryogenic applications," *Advances in Cryogenic Engineering*, AIP Conference Proceedings, Vol. 1218, pp. 913-920 (2010).
9. Koravos, J.J., Miller, T.M., Fesmire, J.E., Coffman, B.E., "Nanogel aerogel as a load bearing insulation material for cryogenic systems," *Advances in Cryogenic Engineering*, AIP Conference Proceedings, Vol. 1218, pp. 921-927 (2010).
10. Williams M.K., Weiser E.S., Fesmire, J.E., Smith, T.M., Grimsley B.W., Brenner J.R., and Nelson G.L. "Effects of cell structure and density on the properties of high performance polyimide foams," *Polymers for Advanced Technologies*, 2005; 16: 167-174.
11. Smith, T.M., Williams, M.K., Fesmire, J.E., Sass, J.P., and Weiser, E.S., "Polyimide-aerogel hybrid foam composites for advanced applications," *Polyimides and Other High Temperature Polymers: Synthesis, Characterization and Applications*, Volume 5, ed. by K. L. Mittal and K. L. Mittalpp, 2009, pp. 295-304.
12. Augustynowicz, S.D., Fesmire, J.E., and Wikstrom, J.P., "Cryogenic Insulation Systems," in 20<sup>th</sup> International Congress of Refrigeration Sydney, no. 2000-1147, International Institute of Refrigeration, Paris, 2000.

27Feb2013

NASA-KSC

101



27Feb2013

NASA-KSC

102